

# Wedgetail Accessory Side Recovery Wing Tracks Bracket

## Fitting Instruction



WTA-TBSW

### Congratulations on the purchase of your Australian made Wedgetail Roof Rack product.

Please read and follow the instructions carefully to ensure correct fitment.

Contact us if any parts appear missing, incorrect, or damaged.

Contact us if any question about the size of platform to ensure the correct fitment







Scan QR code for a fitting demonstration



### Tools Required:

- Hex Key (5mm)
- Spanner (13mm)

### Kit Content

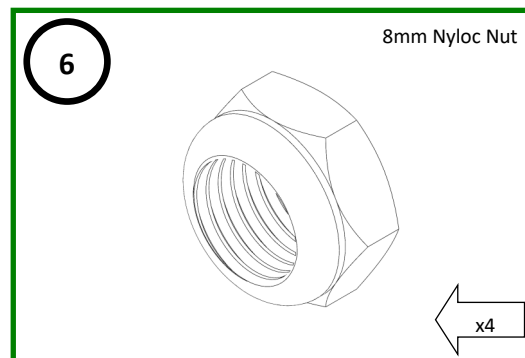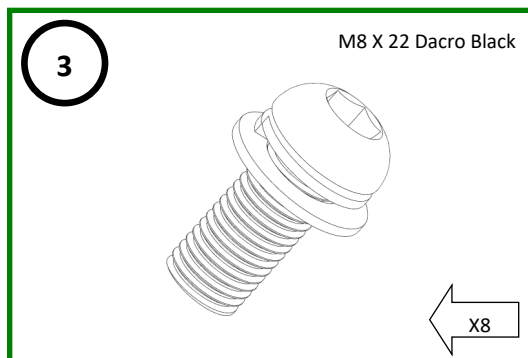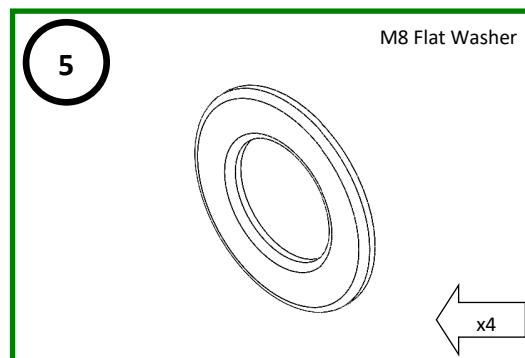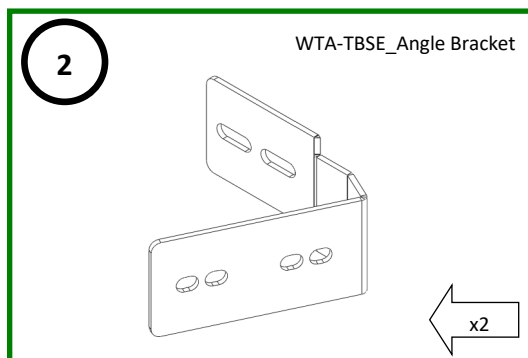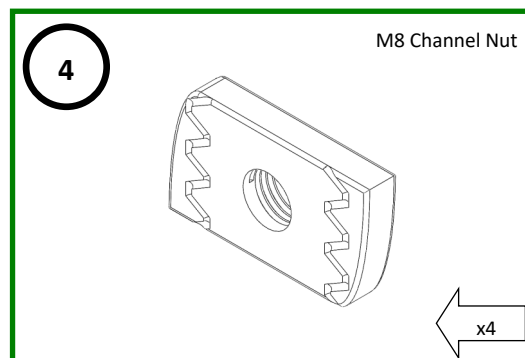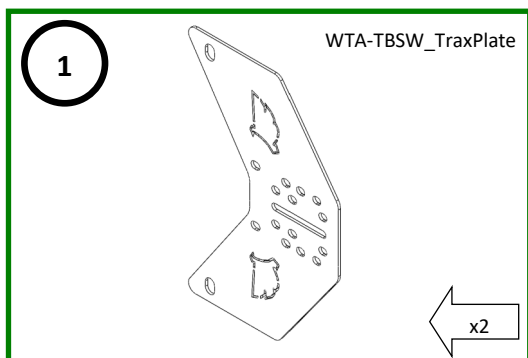

# Wedgetail Accessory Side Recovery Wing Tracks Bracket


## Fitting Instruction



WTA-TBSW

1

- Assemble the Trax plate in the top of the angle bracket using the M8 Bolt, washer and nuts. Refer to the diagram.

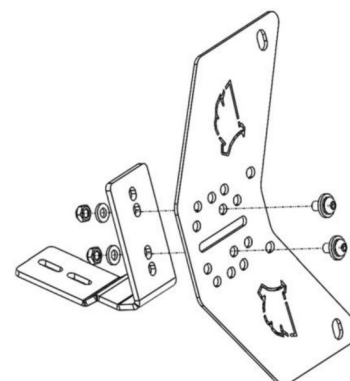

2


- Assemble the bracket on the crossbar using M8 Bolt, washer, and channel nuts.

**NOTE**-Ensure the channel nuts are 90 degrees to the channels.



Check fastenings are firmly tensioned at regular intervals.


Do not overtighten, this will preserve the spring washers.

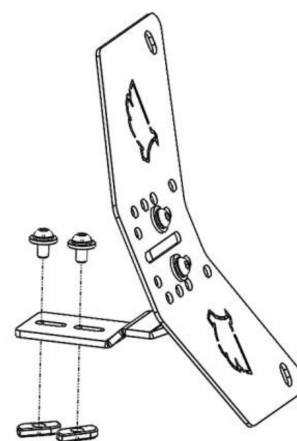

3

- Keep a gap of 3 crossbars and then put the 2nd Trax plate on the 4th crossbar.
- Refer to the diagram below to identify the slot to be used for your rack.

**\* Maxtrax Locking Pins needs to be purchased separately**

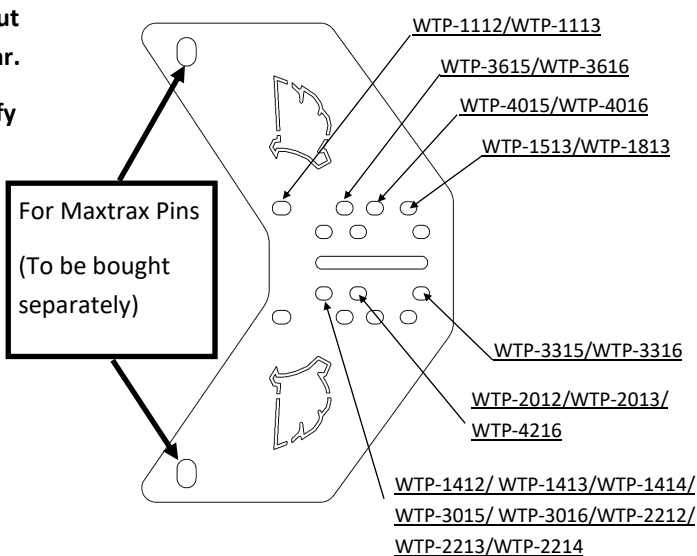

Thank you for your purchase.

Wedgetail by Tradesman Roof Racks

Innovation through Inspiration