



ROOF RACKS

Fitting Instructions

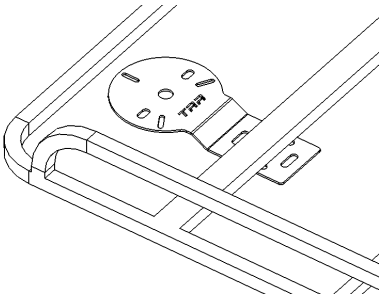
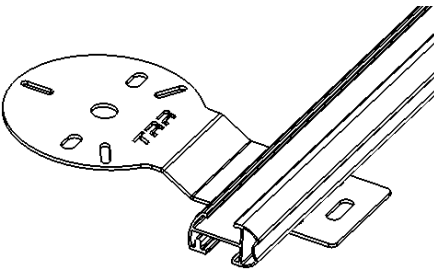
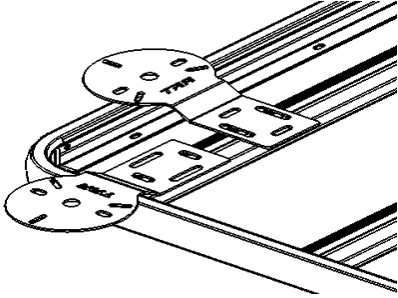
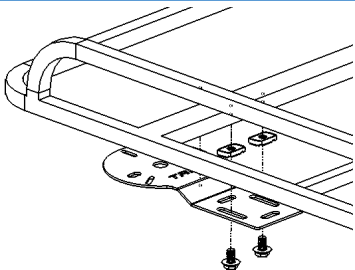
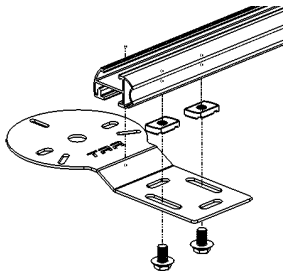
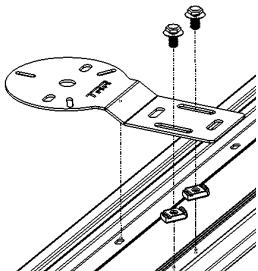
Beacon Plate



READ FROM START TO FINISH BEFORE FITTING ROOF RACK!

Beacon Plate

Assembly Beacon Plate Offset to different Tradesman Roof Rack Product Line

Commercial-Max Roof Rack	Tradesmax Cross Bar	Wedgetail Roof Rack
		
		

- Attach the channel nuts to the beacon plate offset according to the platform/ Crossbar shown above.
- Fit 10mm Bolt / Split washer/ Flat washer / Channel Nuts to beacon plate offset.
- Place the Beacon Plate like shown above, then spin the channel nuts 90 degree in the channel on the underside of the rack till they lock into the channels.

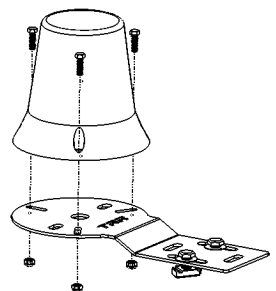
NOTE-Ensure the channel nuts are 90 degrees to the channels.



Check fastenings are firmly tensioned at regular intervals.

Do not overtighten, this will preserve the spring washers.

- After all, place the beacon light on top of the beacon plate. And fit the bolt/ nuts provided by Beacon light supplier until lock with the beacon plate



Thank you for your purchase.

Please complete your warranty application following correct installation.

Wedgetail by Tradesman Roof Racks

Innovation through Inspiration